



RIGA TECHNICAL
UNIVERSITY

Riga Technical University Institute of Telecommunications

Faculty of Electronics
and Telecommunications

«Topical Problems of Nonlinear Wave Physics NWP-2021»

Microsphere-based OFC-WGMR multi-wavelength source and its applications in telecommunications

Toms Salgals, Janis Alnis, Jurgis Porins, Sandis Spolitis and Vjaceslavs Bobrovs



2021

Microsphere-based WGMR-OFC multi-wavelength source and its applications in telecommunications

The "***Development of optical frequency comb generator based on a whispering gallery mode microresonator and its applications in telecommunications***" project aims to obtain new knowledge on whispering gallery mode resonator-based optical frequency combs (WCOMBs) and to develop, construct and test a comb generator prototype for telecommunication applications. The planned result of the project is the portable WCOMB prototype for commercial fiber optical communication systems.






The created WCOMB will achieve the following requirements:

- ✓ provide a frequency comb in the optical C-band (1530-1565 nm), with the number of channels corresponding to $2n$ (n – integer number) that is typical number of FOTS solutions (such as 8, 16 channels)
- ✓ channels' spacing interval between the (WGM) resonator's frequency comb maximum peaks corresponds to the spacing intervals of wavelength-division multiplexing (WDM) transmission system data channels specified by (ITU-T G.694.1) recommendation (such as 100 and 50 GHz).


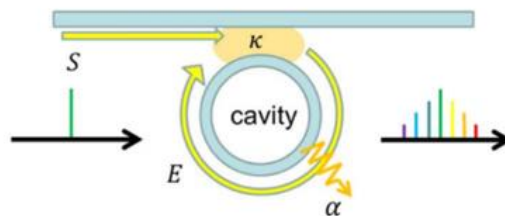


OFC applications in telecommunication systems

- In fiber optical communication systems for data channel typically a single light source is used, for example, WDM systems. To enlarge the data transmission rate, multiple light sources can be used WDM data transmission technology (*where laser arrays are used as a light sources*) is expensive due to the need for many lasers that have to be synchronized.
- Microresonator optical frequency combs OFC have applications in the field of Telecommunications. WCOMB use a single pump source and then generates spectra of various peak frequencies. Each of these frequencies can be used as data channel light source in fiber optical transmission systems. Therefore WCOMB is smaller, less energy consuming and less expensive that standard laser arrays (multiple separate laser sources).

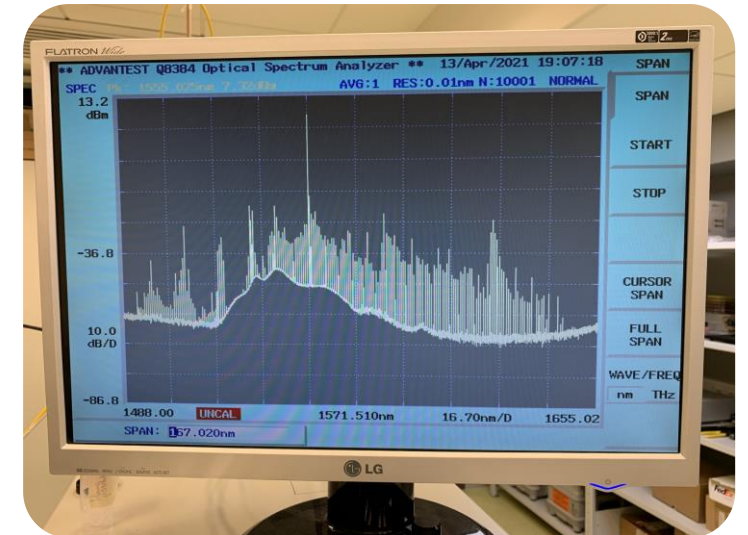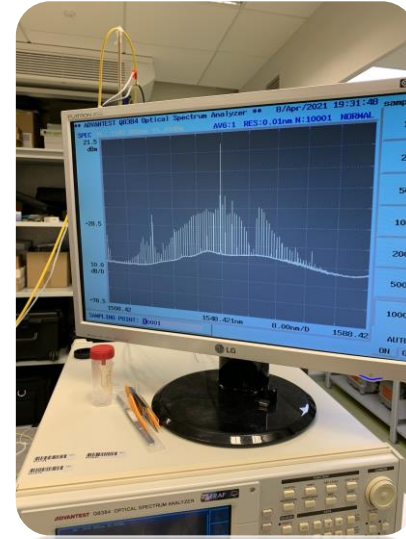
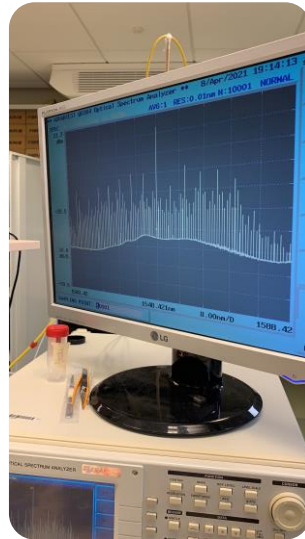
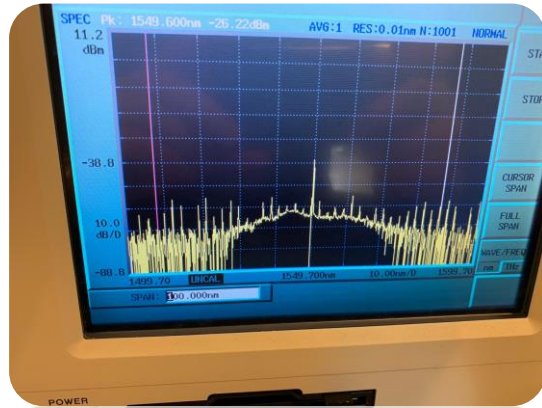
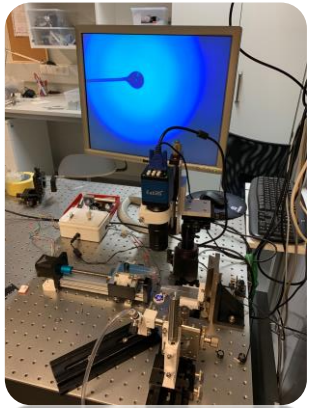


WGMR-OFC (Tapered fiber and coupling conditions)



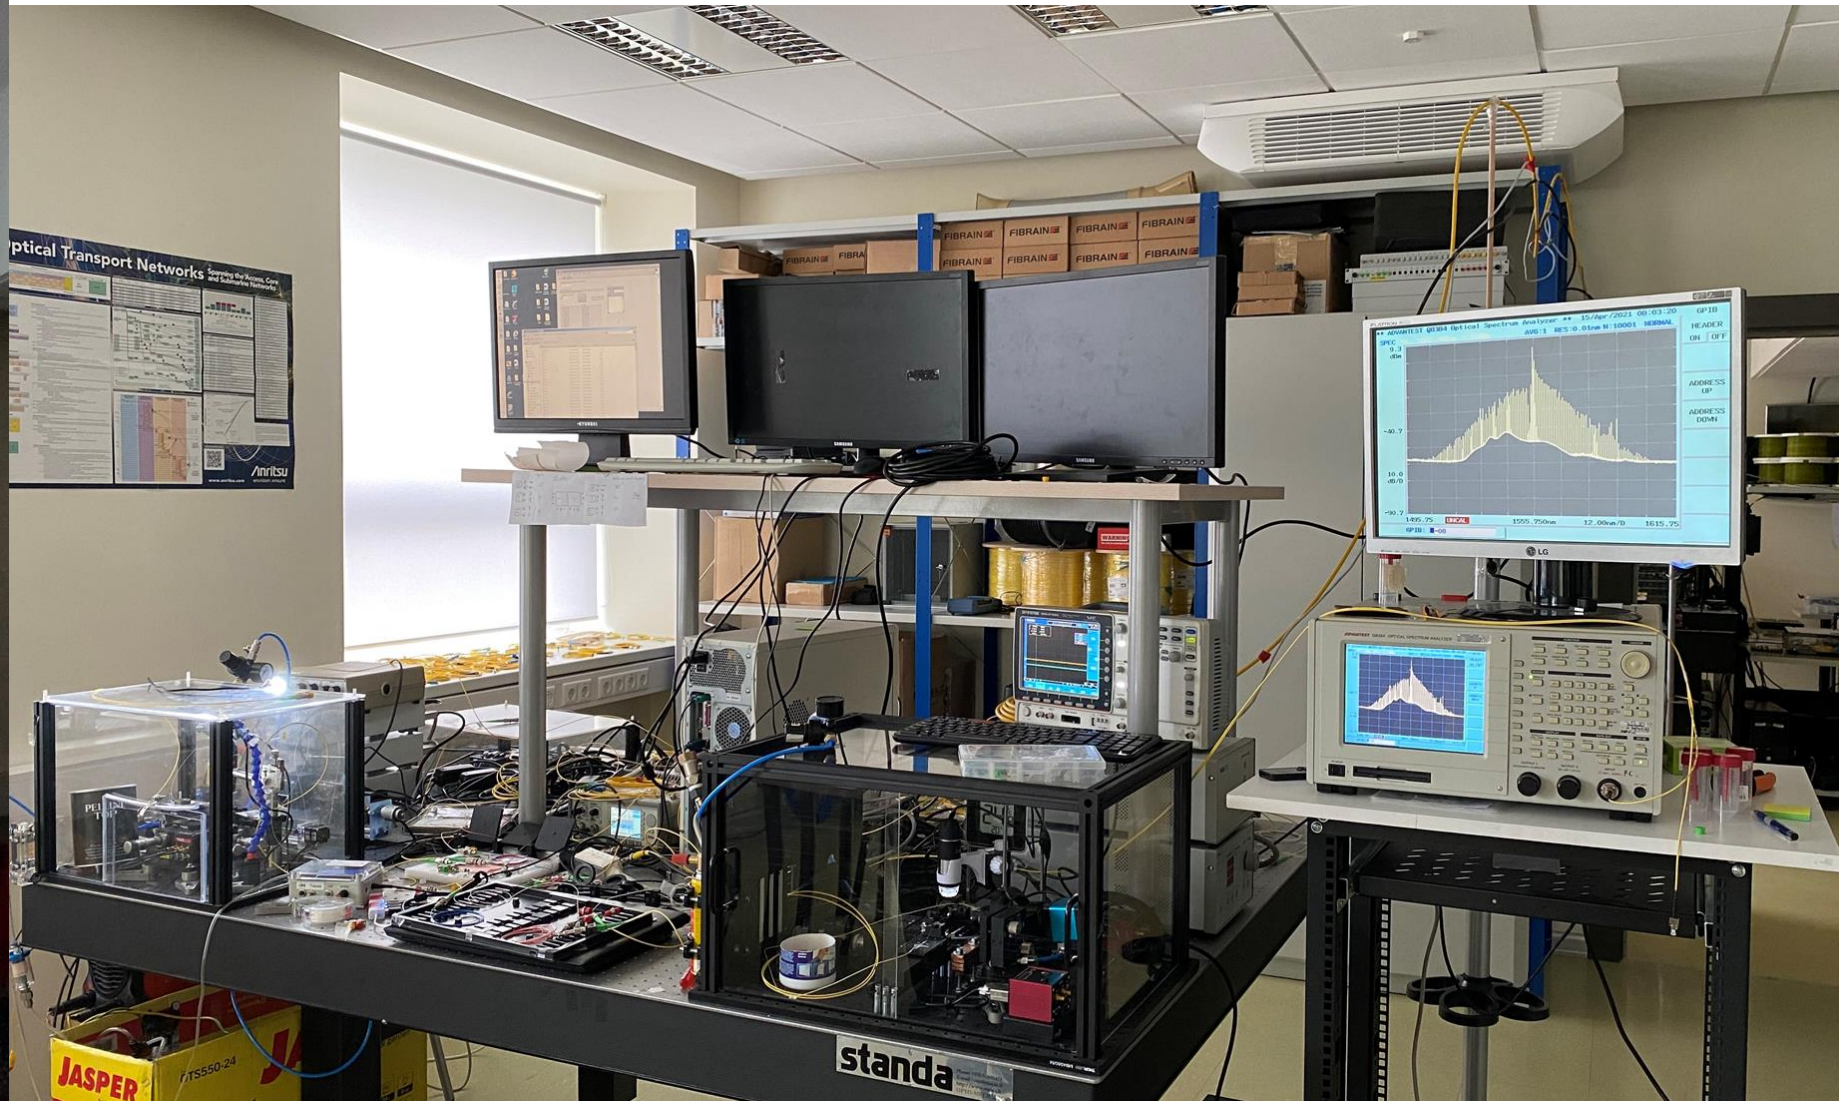
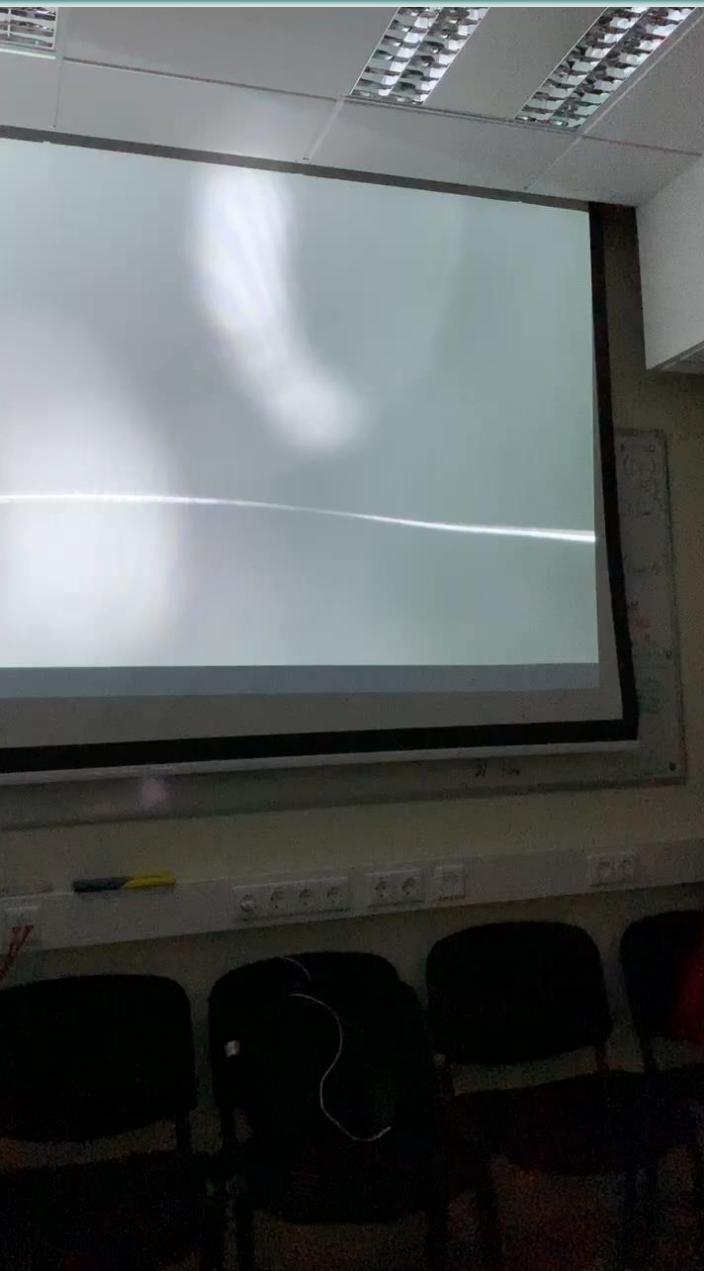


Research of optical frequency comb sources (OFCs) for telecommunication applications

Optical frequency combs obtained in silica microd resonators

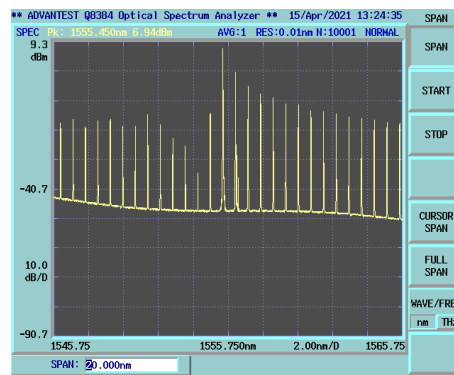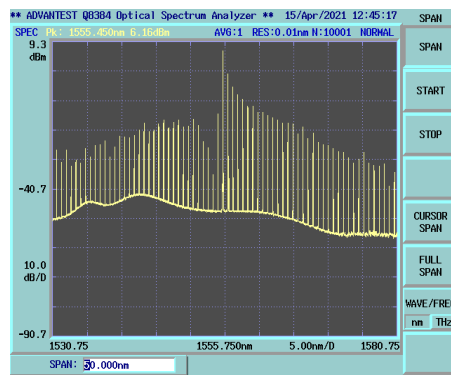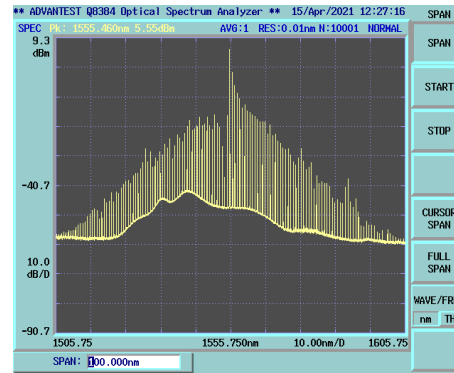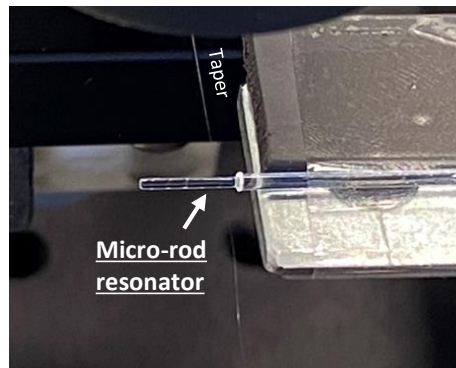


Optical frequency combs obtained in silica microspheres

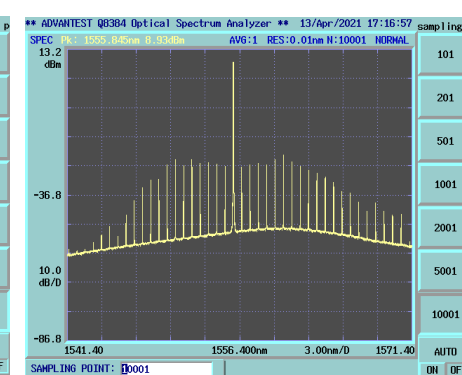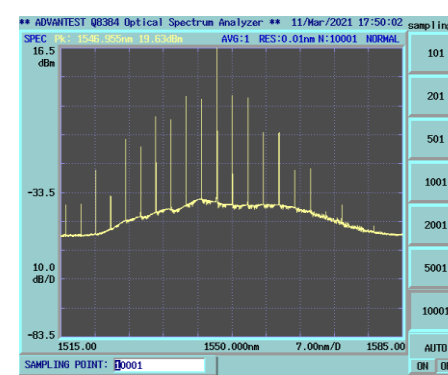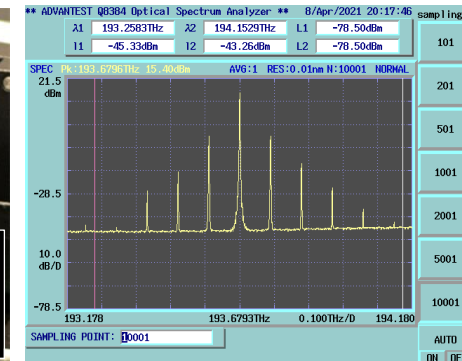
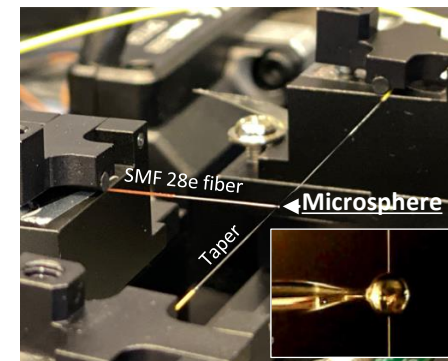


Microd resonators can provide better comb stability over time and enable potential integration on-chip, while the production cost and complexity of silica microspheres is incomparably lower.

Microsphere-based OFC-WGMR multi-wavelength source

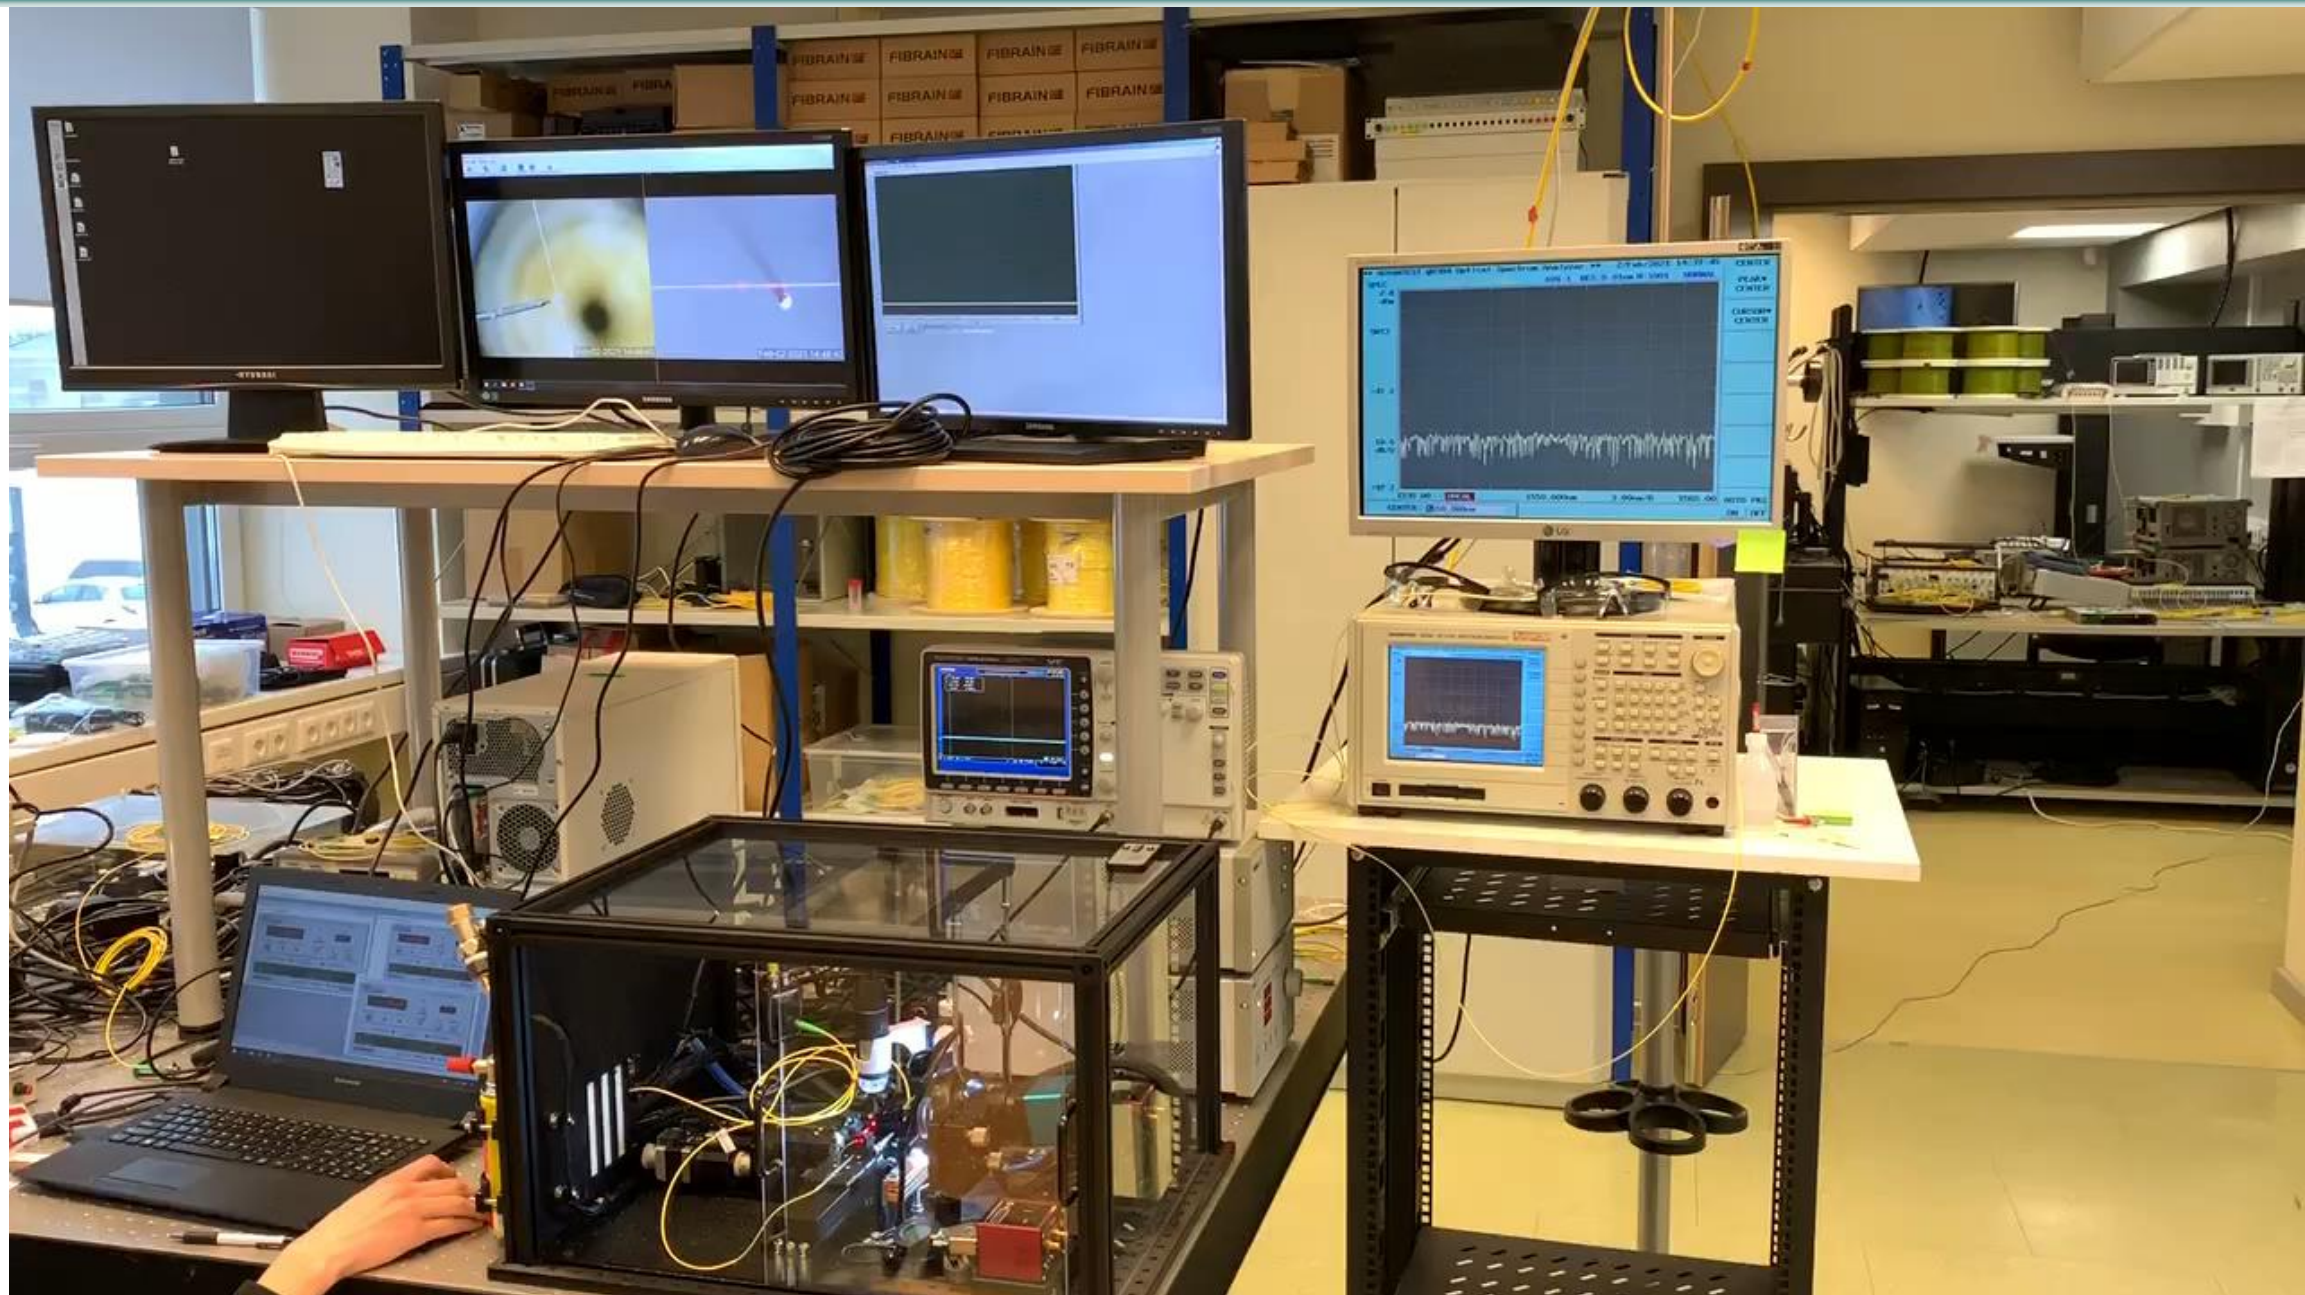

Microsphere-based OFC-WGMR multi-wavelength source

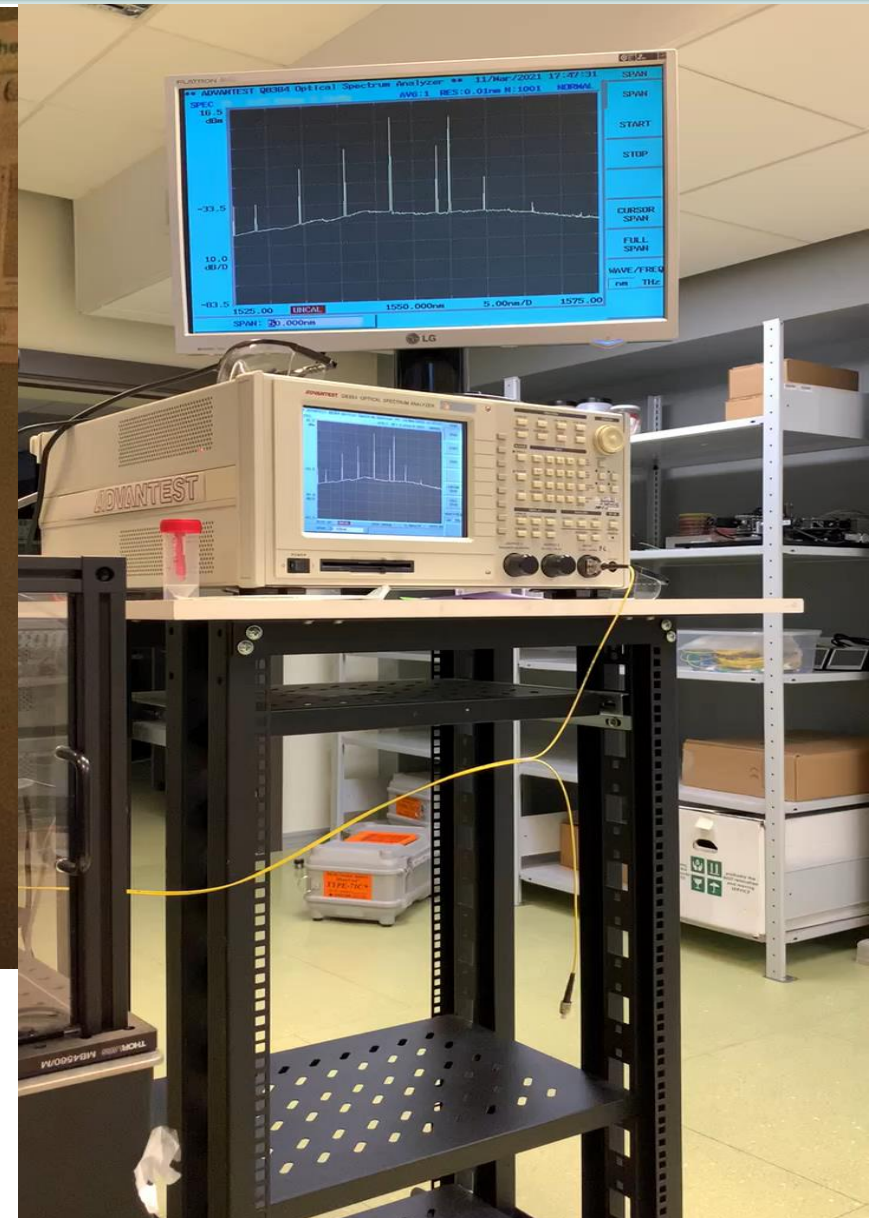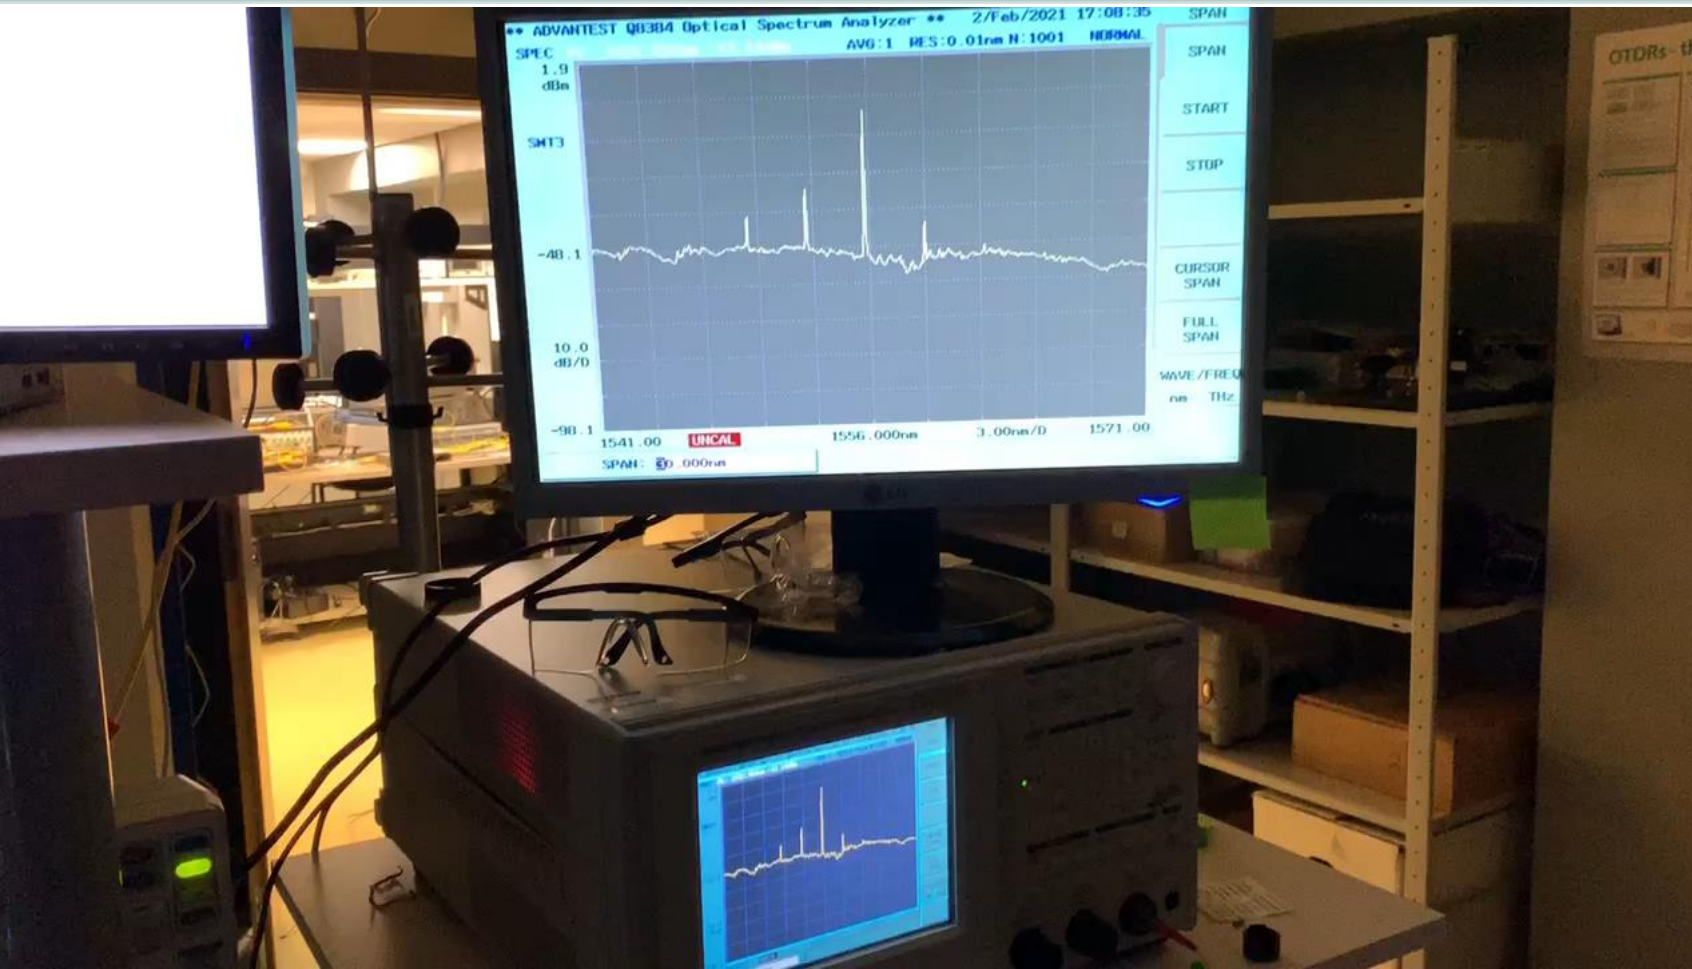

Microsphere-based OFC-WGMR multi-wavelength source and its applications in telecommunications

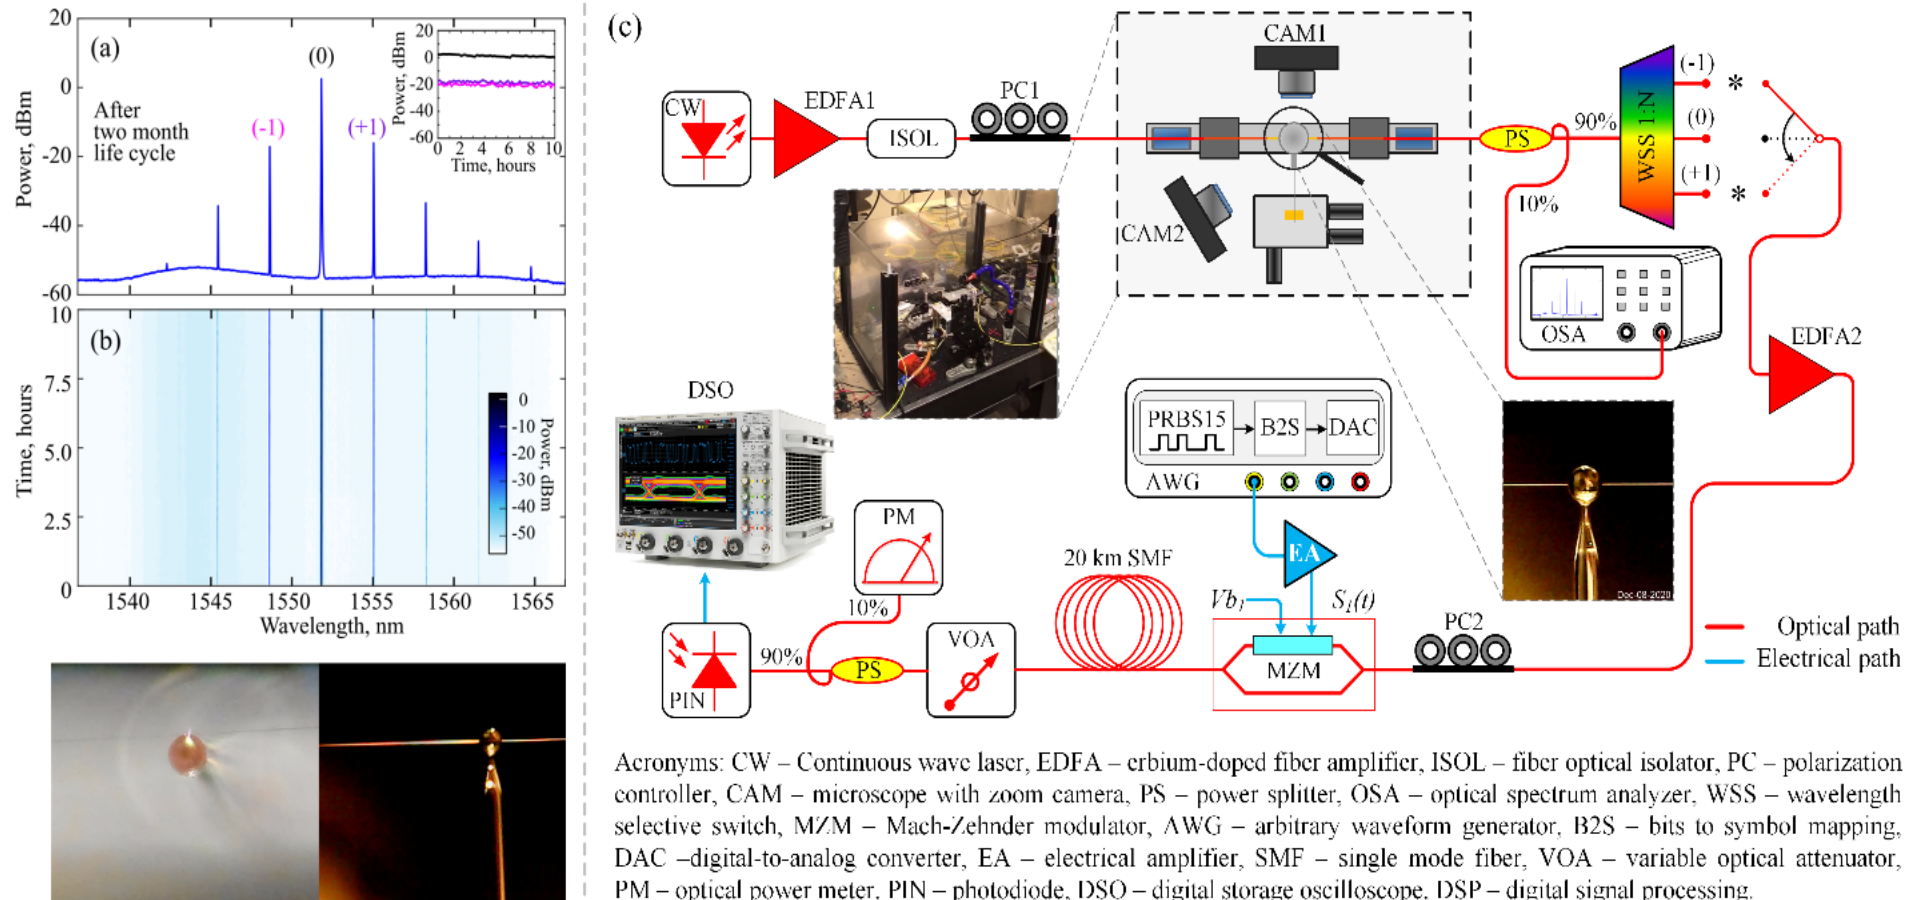


Fig. 1. Measured OFC performance over a 10-hour period: (a) optical spectrum with inset representing captured power stability, and (b) power distribution stability over the wavelength. (c) The experimental setup of the designed silica microsphere WGMR-OFC as a light source where 400 GHz spaced carriers provide NRZ-OOK modulated 2.5 and 10 Gbps data transmission over 20 km SMF fiber. Insets show tapered fiber and silica microsphere resonator positions of coupling conditions and WGMR-OFC reduced humidity and dust-prevention cover box.

Microsphere-based OFC-WGMR multi-wavelength source and its applications in telecommunications







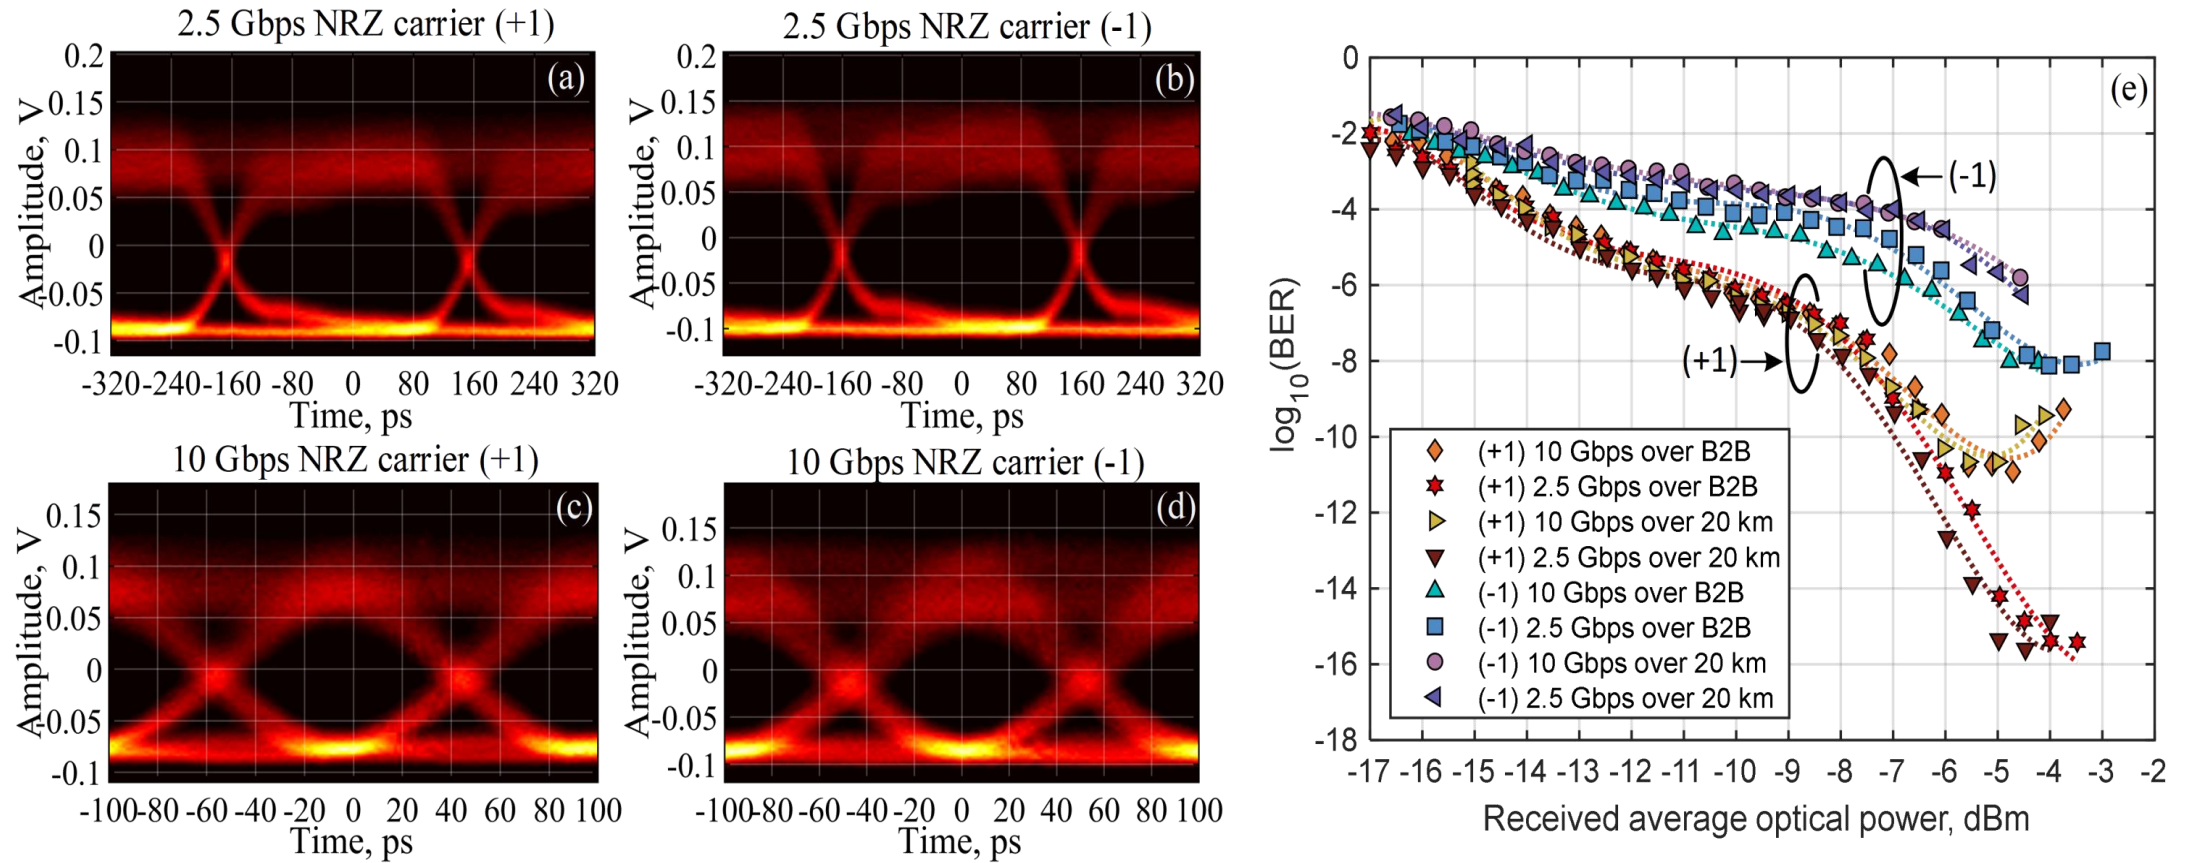


Fig.2. Eye diagrams of the received signal after 20 km transmission over SMF fiber at a data rate of 2.5 Gbps for (a) carrier “+1” and (b) carrier “-1”, and at a data rate of 10 Gbps for (c) carrier “+1” and (d) carrier “-1”, and (e) the plots of BER vs. average received optical power in B2B and after 20 km transmission of the NRZ-OOK modulated signal with bitrates of 2.5 and 10 Gbps for “+1” and “-1” carriers.

Microsphere-based OFC-WGMR multi-wavelength source and its applications in telecommunications

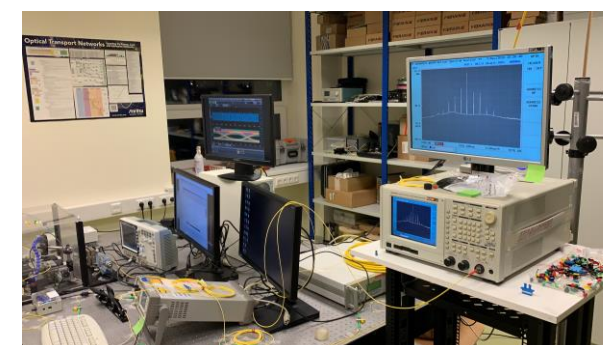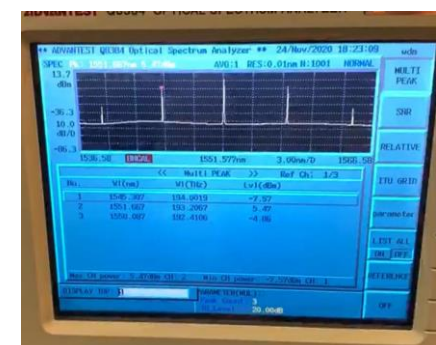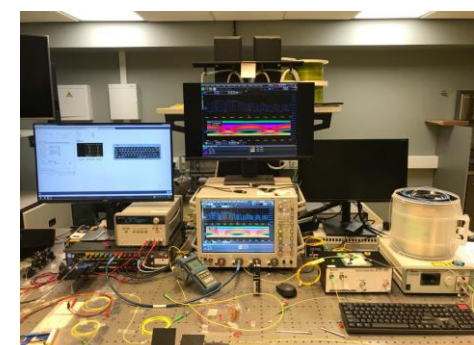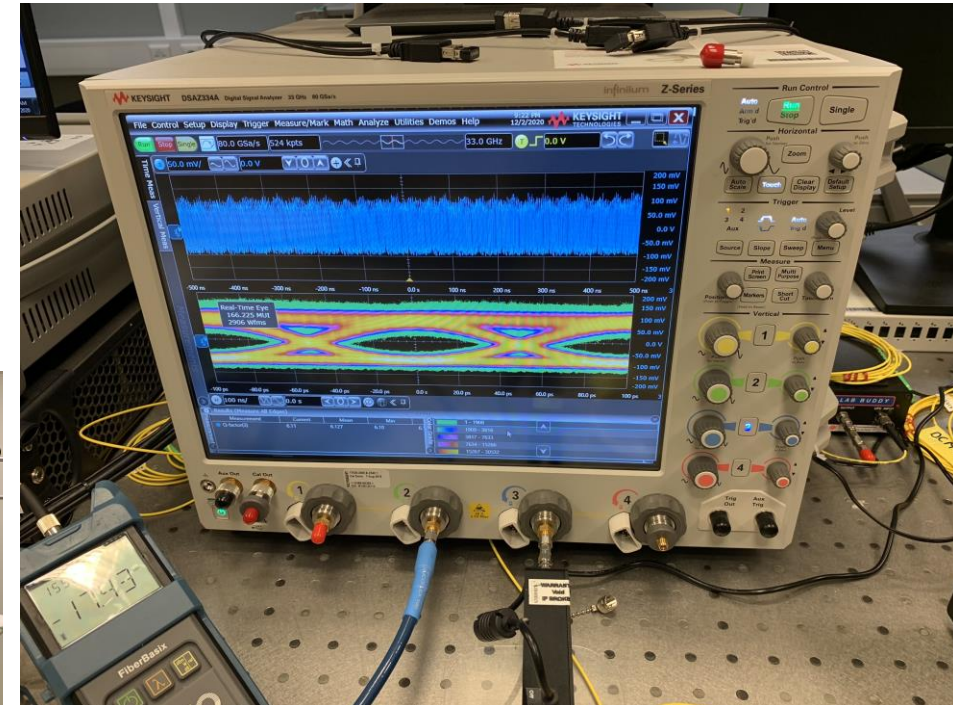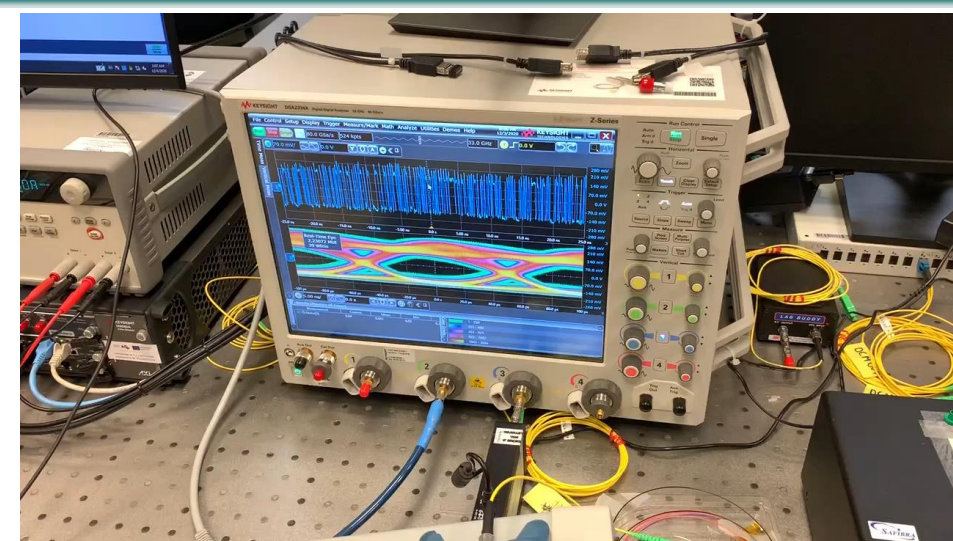

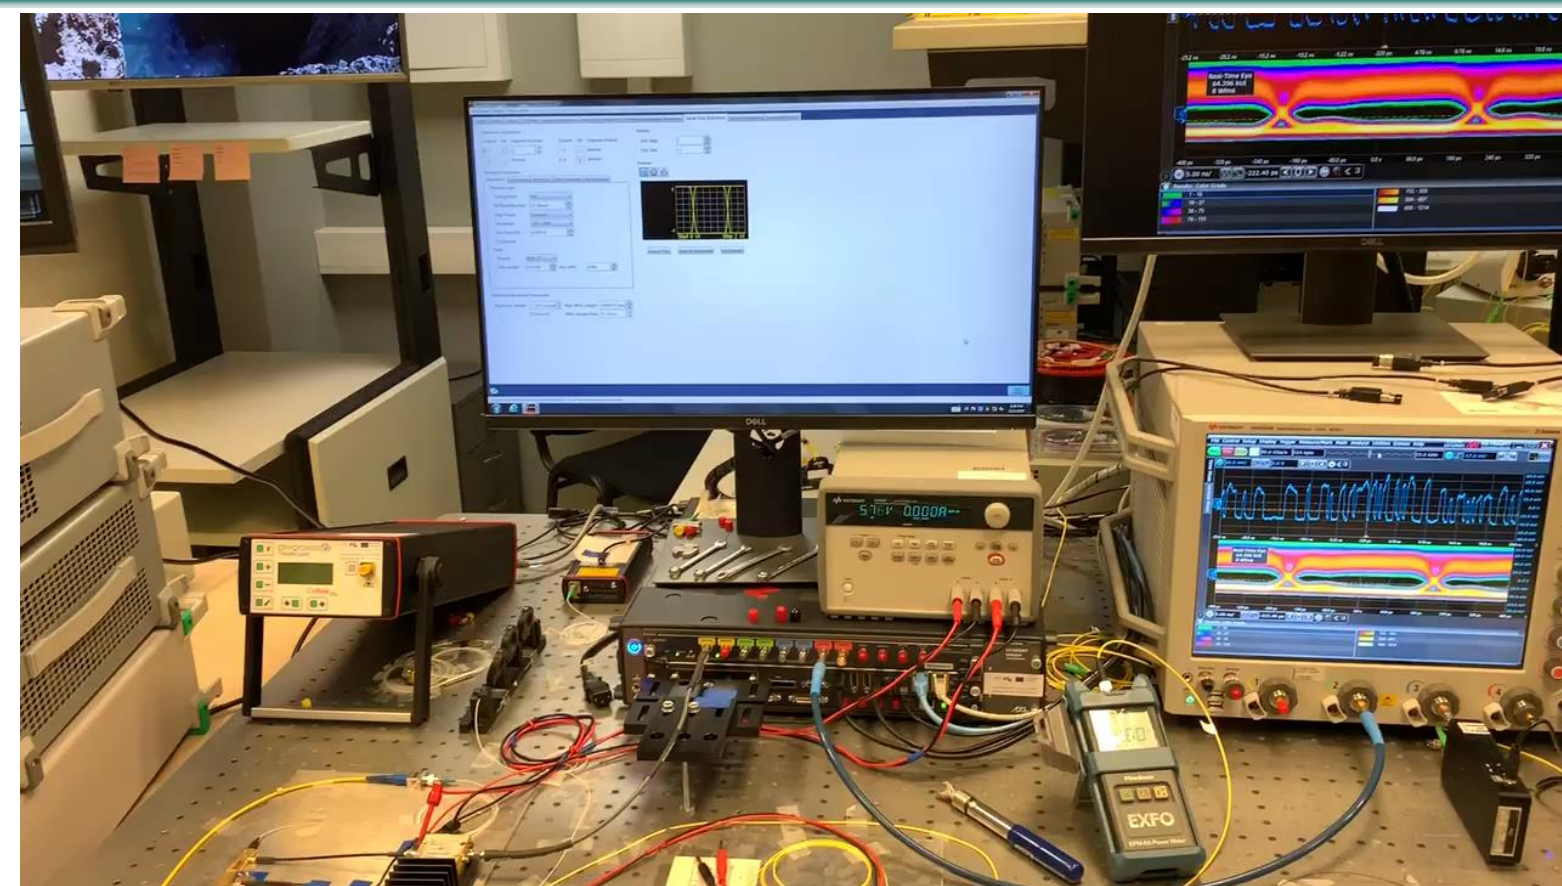

Thank you for your attention!

This research was funded by the European Regional Development Fund project No. 1.1.1.1/18/A/155
“Development of optical frequency comb generator based on a whispering gallery mode microresonator and its applications in telecommunications”.

Welcome and follow us: 😊

<https://www.rtu.lv/en>

<https://www.facebook.com/rtutelekomunikaciju.instituts/>

NACIONĀLAIS
ATTĪSTĪBAS
PLĀNS 2020



EIROPAS SAVIENĪBA
Eiropas Reģionālās
attīstības fonds

IEGULDĪJUMS TAVĀ NĀKOTNĒ